


Automotive Cable

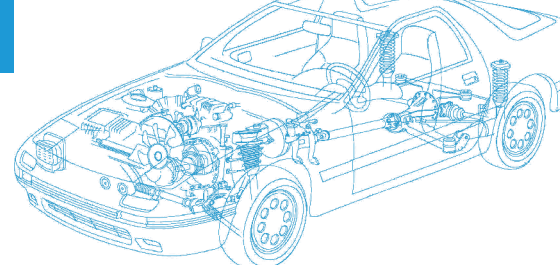


HDT

Application:

This PVC insulated single-core cable is used for automobiles, motorcycles and other motor vehicles.

Construction:

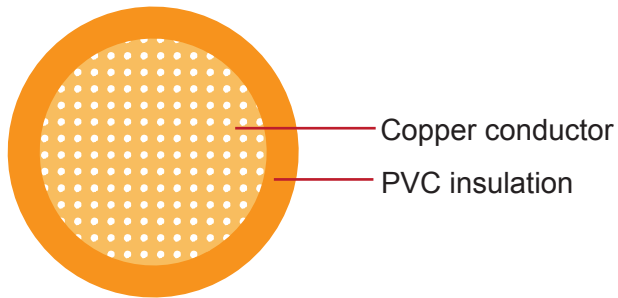

Conductor: Soft-annealed copper according to ASTM B3

Insulation: PVC

Standard Compliance: SAE J1128

Technical Parameters:

Operating temperature: - 40 °C to +85 °C

Size	Conductor			Insulation	Cable	
	Nominal Cross-section	No. and Dia. of Wires	Diameter max.	Thickness Wall nom.	Overall Diameter max.	Weight Approx.
AWG	mm ²	no./mm	mm	mm	mm	kg/km
20	1x0.50	7/0.31	1.00	0.91	2.80	14
18	1x0.80	16/0.26	1.50	0.94	3.00	20
16	1x1.00	19/0.29	1.50	1.02	3.50	25
14	1x2.00	19/0.36	1.80	1.04	3.90	33
12	1x3.00	19/0.45	2.30	1.17	4.60	49
10	1x5.00	19/0.57	3.00	1.17	5.30	71
8	1x8.00	49/0.45	3.70	1.40	6.50	98

*Note: Other configurations, sizes, colors and length not specified herein are available upon request.