



### Type MP-GC Three-Conductor

## Mine Power Feeder Cable, CPE Jacket, 25kV

#### » Applications .....

These cables are designed for connections between units of mine distribution systems, suitable for installed in duct, conduit or open air and for direct burial in wet and dry locations.


#### » Standards .....

ICEA S-75-381/NEMA WC 58

ASTM B-8

CAN/CSA-C22.2 No.96

#### » Construction .....

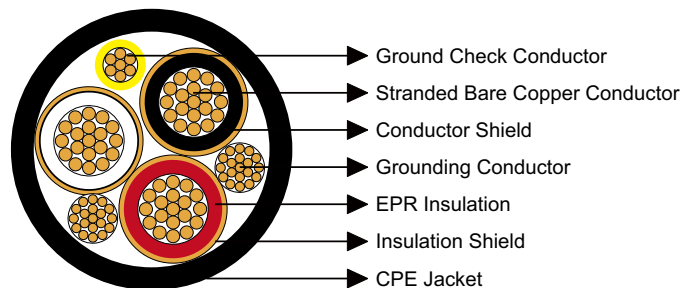

#### **Conductors:**

Stranded annealed bare copper conductor.

#### **Conductor Shield:**

Conducting layer.

#### **Insulation:**

Ethylene Propylene Rubber (EPR).

#### **Insulation Shield:**

Conducting layer + copper tape.

#### **Ground Check Conductor:**

Copper conductor with a yellow polypropylene insulation.



# Caledonian Mining Cables

## Mine Power Feeder Cables

### Grounding Conductor:

Tinned copper conductor.

### Jacket:

Chlorinated Polyethylene (CPE), black.

### » Options .....

- Other jacket materials such as CSP/PCP/NBR/PVC/TPU are available upon request.

### » Mechanical and Thermal Properties .....

Minimum Bending Radius: 12×OD

Maximum Conductor Operating Temperature: +90°C

### » Dimensions and Weight .....

Construction	No. of Strands	Grounding Conductor Size	Ground Check Conductor Size	Nominal Insulation Thickness		Nominal Jacket Thickness		Nominal Overall Diameter		Nominal Weight		Ampacity
				inch	mm	inch	mm	inch	mm	lbs/kft	kg/km	
No. of cores×AWG/kcmil	-	AWG/kcmil	AWG/kcmil	inch	mm	inch	mm	inch	mm	lbs/kft	kg/km	A
3×1	19	5	8	0.260	6.4	0.14	3.6	2.37	60.2	3435	5112	187
3×1/0	19	4	8	0.260	6.4	0.14	3.6	2.45	62.2	3815	5677	218
3×2/0	19	3	8	0.260	6.4	0.14	3.6	2.54	64.5	4290	6384	249
3×3/0	19	2	8	0.260	6.4	0.14	3.6	2.65	67.3	4875	7255	286
3×4/0	19	1	8	0.260	6.4	0.14	3.6	2.81	71.4	5665	8430	327
3×250	37	1/0	8	0.260	6.4	0.17	4.3	2.97	75.4	6495	9666	360
3×350	37	2/0	8	0.260	6.4	0.17	4.3	3.18	80.8	7970	11860	438
3×500	37	4/0	8	0.260	6.4	0.17	4.3	3.45	87.6	10300	15328	536

Ampacity-Based on a conductor temperature of 90°C and an ambient air temperature of 40°C, per ICEA S-75-381.