




Type 210 1.1/1.1KV

» Applications

These cables are mainly used for hand-held boring machines and drills.

» Standards

- AS/NZS 1802:2003
- AS/NZS 1125
- AS/NZS 3808
- AS/NZS 5000.1

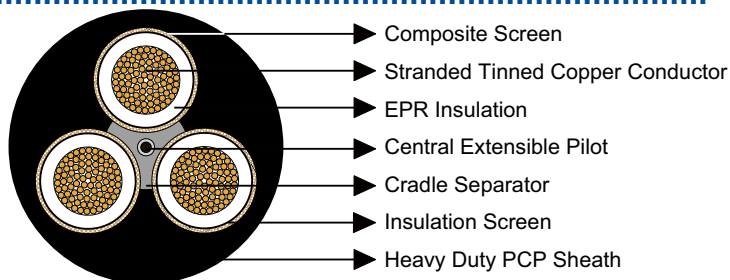

» Construction

3×Conductors: Flexible stranded tinned annealed copper conductor.

Insulation: EPR.

Insulation Screen: Semiconductive elastomer.

Composite Screen (earth conductor): Tinned annealed copper braiding interwove with polyester yarn.

Cradle Separator: Semiconductive PCP.

1×Central Extensible Pilot: EPR covered flexible stranded tinned copper conductor.

Sheath: Heavy duty PCP sheath. Heavy duty CPE/CSP sheath can be offered upon request.

» Dimensions and Weight

Nominal Conductor Area	Strand Size	Insulation Thickness	Core Screen		Pilot Conductor		Thickness of Sheath	Nominal Overall Diameter	Nominal Weight
			Strand Size	Area of Screen	Strand Size	Thickness of Covering			
mm ²	No/mm	mm	No/mm	mm ²	No/mm	mm	mm	mm	kg/100m
Type 210									
1.5	30/0.25	1.4	7/0.25	5.2	24/0.20	0.8	3.0	23.7	83
2.5	50/0.25	1.5	7/0.25	5.8	24/0.20	0.8	3.0	25.1	92