


FIREROL Medium Wall Multicore Unscreened Cables 300/500 V or 0.6/1 kV EN 50264-3-2 (FRL-MW-05M/FRL-MW-1M)

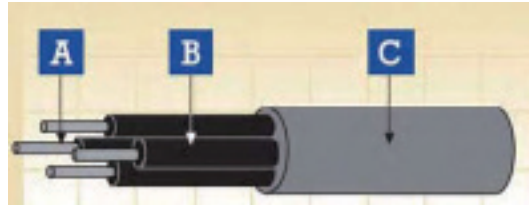

A. Conductor B. Insulation C. Sheath

Application

- Used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor.
- Used in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

Construction

Conductor

Flexible tinned annealed copper wires, stranded as per HD 383 (IEC 60228) class 5

Insulation

LSZH elastomeric compound as defined in EN 50264-1 (EI 106 to EI 110)

Outer Sheath

LSZH elastomeric compound as defined in EN 50264-1 (EM 101 to EM 104)

Electrical & Mechanical Properties

Nominal Voltage

300/500 V or 0.6/1 kV

Max. Conductor Temperature

90 °C (fixed installation)

Min. Permissible Ambient Temperature

-25 °C/-40 °C (fixed installation)

Bending Radius

Fixed installation:

4 x Overall Diameter (D<12mm);

5 x Overall Diameter (D>12mm)

Flexible installation:

8 x Overall Diameter (D<12mm);

10 x Overall Diameter (D>12mm)

Chemical & Environmental Properties

No fluorine

Resistance to mineral oil & fuel oil, acid & alkali

Resistance to ozone

EN 60684-2

EN 50305; EN 60811-2-1

EN 50305

Fire Performance for Rolling Stock Application

EN 50306-2

DIN 5510-2

BS 6853

NF F 16-101

Hazard levels HL1, HL2/HL3, HL4

Protection level 1/2/3/4

Interior use 1a, 1b, II; Exterior use 1a, 1b, II

F0

Fire Performance in General

EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)

EN 50266-2-4 + EN 50305; IEC 60332-3-24;

NF C 32-070 2.2 (C1); VDE 0472 Teil 804

EN 50268-2; IEC 61034-2; NF C 32-073 ;

NF C 20-902; NF F 16 101; VDE 0472 Teil 816

EN 50267-2-1; IEC 60754-1; NF C 32-074;

NF C 20-454; VDE 0472 Teil 815

EN 50267-2-2/3; IEC 60754-2; NF C 32-074;

NF C 20-453; VDE 0472 Teil 813

EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853

NF F 63 808; BS6853; NF F 16 101

Vertical flame propagation for a single insulated wire or cable
Vertical flame spread of vertically mounted bunched wires or cables

Low Smoke Emission

Halogen Free

Low Corrosivity (Acidity & Conductivity)


Low Toxicity

Smoke Index

FRL-MW-05M 300/500 V

Nominal Cross-Sectional Area (a)	Conductor Diameter (b)	Min. Mean Thickness of Insulation	Core Dimensions		Min. Average Sheath Thickness	Overall Diameter		Weight	Max. Conductor Resistance 20 °C	Min. Insulation Resistance	
			Min. Acc. to EN	Max. Acc. to EN		Min.	Max.			EI 110 20 °C	EI 106/7/8/9 20 °C
n x mm ²	mm	mm	mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ x km	MΩ x km
2 x 1	1.25	0.4	2.0	2.4	0.6	5.3	6.2	40	20.0	15.0	7.5
4 x 1	1.25	0.4	2.0	2.4	0.6	6.1	7.2	70	20.0	15.0	7.5
7 x 1	1.25	0.4	2.0	2.4	0.7	7.5	8.7	120	20.0	15.0	7.5
9 x 1	1.25	0.4	2.0	2.4	0.7	9.1	10.6	160	20.0	15.0	7.5
12 x 1	1.25	0.4	2.0	2.4	0.7	9.8	11.5	190	20.0	15.0	7.5
19 x 1	1.25	0.4	2.0	2.4	0.8	11.7	13.7	290	20.0	15.0	7.5
24 x 1	1.25	0.4	2.0	2.4	1.0	14.1	16.5	390	20.0	15.0	7.5
32 x 1	1.25	0.4	2.0	2.4	1.0	15.5	18.2	490	20.0	15.0	7.5
37 x 1	1.25	0.4	2.0	2.4	1.0	16.1	18.9	550	20.0	15.0	7.5
40 x 1	1.25	0.4	2.0	2.4	1.0	16.7	19.6	600	20.0	15.0	7.5
4 x 1.5	1.5	0.5	2.4	2.9	0.7	7.3	8.6	110	13.7	14.0	7.0
7 x 1.5	1.5	0.5	2.4	2.9	0.7	8.7	10.2	170	13.7	14.0	7.0
9 x 1.5	1.5	0.5	2.4	2.9	0.8	10.9	12.7	230	13.7	14.0	7.0
12 x 1.5	1.5	0.5	2.4	2.9	0.8	11.8	13.8	280	13.7	14.0	7.0
19 x 1.5	1.5	0.5	2.4	2.9	1.0	14.2	16.6	440	13.7	14.0	7.0
24 x 1.5	1.5	0.5	2.4	2.9	1.0	16.6	19.5	560	13.7	14.0	7.0
32 x 1.5	1.5	0.5	2.4	2.9	1.2	18.7	21.9	720	13.7	14.0	7.0
37 x 1.5	1.5	0.5	2.4	2.9	1.2	19.5	22.8	820	13.7	14.0	7.0
4 x 2.5	1.95	0.5	2.9	3.4	0.7	8.3	9.8	150	8.21	13.0	6.5
7 x 2.5	1.95	0.5	2.9	3.4	0.8	10.2	11.9	240	8.21	13.0	6.5
9 x 2.5	1.95	0.5	2.9	3.4	1.0	12.9	15.1	350	8.21	13.0	6.5
12 x 2.5	1.95	0.5	2.9	3.4	1.0	13.9	16.3	420	8.21	13.0	6.5
19 x 2.5	1.95	0.5	2.9	3.4	1.0	16.3	19.1	640	8.21	13.0	6.5
24 x 2.5	1.95	0.5	2.9	3.4	1.2	19.6	22.9	840	8.21	13.0	6.5

(a)= One earth conductor (green/yellow) can be included upon request
 (b)= For information, indicative only

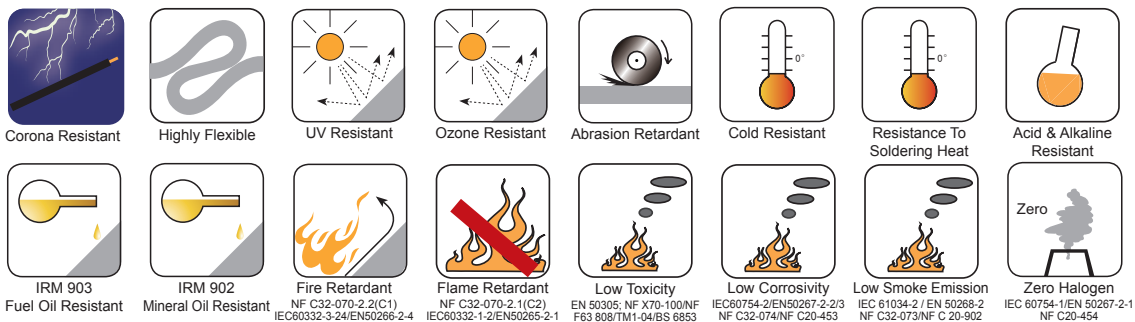

EN 50264 Rolling Stock Cables

FRL-MW-1M 0.6/1 kV

Nominal Cross-Sectional Area (a)	Conductor Diameter (b)	Min. Mean Thickness of Insulation	Core Dimensions		Min. Average Sheath Thickness	Overall Diameter		Weight	Max. Conductor Resistance 20 °C	Min. Insulation Resistance	
			Min. Acc.to EN	Max. Acc.to EN		Min.	Max.			20 °C	20 °C
TWO CORES											
1.5	1.5	0.7	2.8	3.3	0.70	7.2	9.0	70	13.7	21.0	10.5
2.5	1.95	0.7	3.2	3.8	0.70	8.0	10.0	100	8.21	17.2	8.6
4	2.5	0.7	3.8	4.4	0.70	9.1	11.3	130	5.09	14.2	7.1
6	3.0	0.7	4.2	5.0	0.80	10.1	12.4	170	3.39	12.2	6.1
10	3.9	0.7	5.1	5.9	1.00	12.5	15.4	290	1.95	9.8	4.9
16	5.0	0.7	6.1	7.2	1.00	14.9	18.4	390	1.24	7.9	3.9
25	6.4	0.9	7.8	9.1	1.20	18.7	23.0	590	0.795	7.3	3.6
35	7.7	0.9	9.0	10.6	1.20	21.2	25.9	790	0.565	6.7	3.3
50	9.2	1.0	10.6	12.4	1.40	25.1	30.7	1140	0.393	6.3	3.1
THREE CORES											
1.5	1.5	0.7	2.8	3.3	0.70	7.7	9.5	100	13.7	21.0	10.5
2.5	1.95	0.7	3.2	3.8	0.70	8.5	10.5	130	8.21	17.2	8.6
4	2.5	0.7	3.8	4.4	0.70	9.7	12.0	180	5.09	14.2	7.1
6	3.0	0.7	4.2	5.0	0.80	10.7	13.2	250	3.39	12.2	6.1
10	3.9	0.7	5.1	5.9	1.00	13.3	16.5	410	1.95	9.8	4.9
16	5.0	0.7	6.1	7.2	1.00	16.0	19.6	570	1.24	7.9	3.9
25	6.4	0.9	7.8	9.1	1.20	20.0	24.7	850	0.795	7.3	3.6
35	7.7	0.9	9.0	10.6	1.40	23.0	28.2	1160	0.565	6.7	3.3
50	9.2	1.0	10.6	12.4	1.60	26.3	32.2	1680	0.393	6.3	3.1
FOUR CORES											
1.5	1.5	0.7	2.8	3.3	0.70	8.5	10.5	120	13.7	21.0	10.5
2.5	1.95	0.7	3.2	3.8	0.70	9.4	11.6	170	8.21	17.2	8.6
4	2.5	0.7	3.8	4.4	0.80	10.9	13.4	240	5.09	14.2	7.1
6	3.0	0.7	4.2	5.0	1.00	12.2	14.9	330	3.39	12.2	6.1
10	3.9	0.7	5.1	5.9	1.00	14.7	18.2	540	1.95	9.8	4.9
16	5.0	0.7	6.1	7.2	1.20	18.0	22.1	750	1.24	7.9	3.9
25	6.4	0.9	7.8	9.1	1.40	22.6	27.6	1140	0.795	7.3	3.6
3 x 35+25	7.7/6.4	0.9/0.9	9.0/7.8	10.6/9.1	1.40	25.7	31.2	1490	0.565/0.795	6.7	3.3
3 x 50+25	9.2/6.4	1.0/0.9	10.6/7.8	12.4/9.1	1.60	30.0	36.5	2110	0.393/1.795	6.3	3.1

(a)= For information, indicative only

