




NF F 63-827 Rolling Stock Cables

NF F 63-827 Extra-Flexible High Temperature Sheathed Single Core 3000V

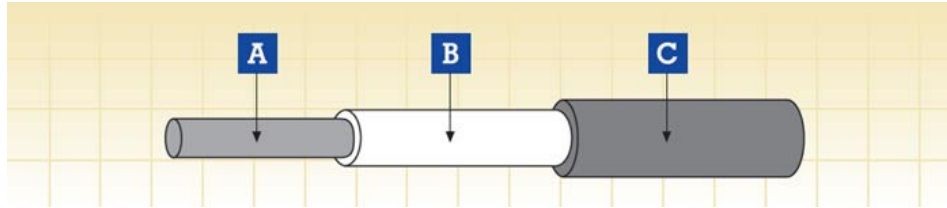

A. Conductor B. Insulation C. Sheath

Application

These cables are used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor, suitable for used in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

Construction

Conductor

Stranded tinned copper wires to IEC 60228 Class 6

Insulation

Silicone halogen free rubber

Reinforcement

Textile braid

Sheath

Silicone halogen free rubber

Electrical & Mechanical Properties

Nominal Voltage	3000V
Maximum Conductor Temperature	+120/+140°C
Temperature Range	-40°C ~135°C
Bending Radius	3×OD

Standards




NF F 63-827
NF F 16-101

Fire Performance in general

EN 50265-2-1; IEC 60332-1; BS 4066-1
 EN 50266-2-4 + EN 50305; IEC 60332-3C;
 VDE 0472 Teil 804; BS 4066-3; NFC 32070
 EN 50268-2; IEC 61034-2; VDE 0472 Teil 816
 EN 50267-2-1; IEC 60754-1; VDE 0472 Teil 815
 EN 50267-2-2/3; IEC 60754-2; VDE 0472 Teil 813
 EN 50305; NFX 70-100; NFF 63808; TM1-04; BS6853
 NFF 16101; NFF 63808; BS6853

Vertical flame propagation for a single insulated wire or cable
Fire propagation of bunched wires and cables;

Smoke density
 Halogen Free
 Corrosivity of gases (Acidity & Conductivity)
 Toxicity index
 Smoke index



**NF F 63-827 Rolling Stock Cables**

Nominal Cross Sectional Area	Number & Nominal Diameter of Strands	Nominal Insulation Thickness	Overall Diameter		Weight
			Min.	Max.	
mm ²	No/mm	mm	mm	mm	kg/km
25.0	800/0.20	2.8	12.0	13.2	390
35.0	1120/0.20	2.8	13.2	14.7	500
50.0	705/0.30	3.0	15.2	16.7	680
70.0	990/0.30	3.2	17.1	18.8	930
95.0	1340/0.30	3.2	19.0	21.0	1150
120.0	1690/0.30	3.3	21.0	23.1	1470
150.0	2123/0.30	3.3	22.8	25.0	1800
185.0	1470/0.40	3.4	24.7	27.1	2240
240.0	1905/0.40	3.6	27.6	31.2	2820