




# Cables for Oil Industry

## Double Galvanized Steel Tape Armored Optical Fiber Cable with Lead Cover

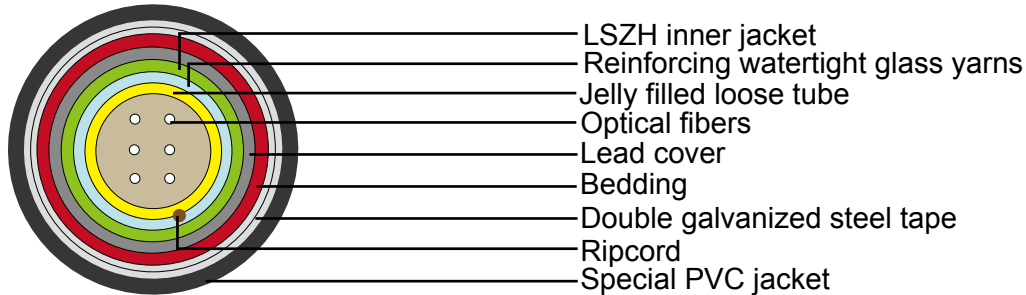

## Double Galvanized Steel Tape Armored Optical Fiber Cable with Lead Cover

### Applications

These cables are suitable for underground use in all refineries. The special design can resist aliphatic and aromatic hydrocarbon and U.V.

### Standards

IEC 794-1-E1; IEC 794-1-E3; IEC 794-1-E4; IEC 794-1-F1; IEC 60332-3-22 Cat.A

### Properties

Operating temperature: -20~60°C

Chemical resistance: Aliphatic and aromatic hydrocarbon resistance

No. of Optical Fiber	Fiber Optic Type	No. of Tube	Diameter over Inner Sheath (mm)	Diameter over Lead Sheath (mm)	Diameter over Armor (mm)	Min. O.D. (mm)	Max. O.D. (mm)	Approx. Weight (kg/km)
4	50/125	1	6.6	8.4	10.04	12.6	14	448
4	62.5/125	1	6.6	8.4	10.04	12.6	14	448
6	50/125	1	6.6	8.4	10.04	12.6	14	448
6	62.5/125	1	6.6	8.4	10.04	12.6	14	448
8	50/125	1	6.6	8.4	10.04	12.6	14	448
8	62.5/125	1	6.6	8.4	10.04	12.6	14	448
8	9/125	1	6.6	8.4	10.04	12.6	14	448
12	50/125	1	6.6	8.4	10.04	12.6	14	448
12	62.5/125	1	6.6	8.4	10.04	12.6	14	448
12	9/125	1	6.6	8.4	10.04	12.6	14	448
16	62.5/125	1	6.6	8.4	10.04	12.6	14	448
24	50/125	1	6.6	8.4	10.04	12.6	14	448
24	62.5/125	1	6.6	8.4	10.04	12.6	14	448