




Steel Wire Armored Optical Fiber Cable with Lead Cover

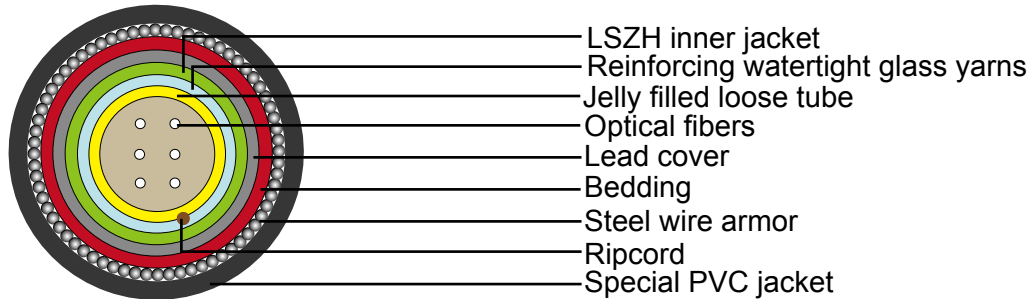

Steel Wire Armored Optical Fiber Cable with Lead Cover

Applications

These cables are suitable for underground use in all refineries. The special design can resist aliphatic and aromatic hydrocarbon and U.V.

Standards

IEC 794-1-E1; IEC 794-1-E3; IEC 794-1-E4; IEC 794-1-F1; IEC 60332-3-22 Cat.A

Properties

Operating temperature: -20~60°C

Chemical resistance: Aliphatic and aromatic hydrocarbon resistance

No. of Optical Fiber	Fiber Optic Type	No. of Tube	Diameter over Inner Sheath (mm)	Diameter over Lead Sheath (mm)	Diameter over Sheath (mm)	Diameter over Armor (mm)	Min. O.D. (mm)	Max. O.D. (mm)	Approx. Weight (kg/km)
4	50/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
4	62.5/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
6	50/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
6	62.5/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
8	50/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
8	62.5/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
8	9/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
12	50/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
12	62.5/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
12	9/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
16	62.5/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
24	50/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625
24	62.5/125	1	6.6	8.4	10.4	12.2	14.7	16.4	625