


Hybrid Coaxial Cables

RG59 + 2 x 1.5mm²+ 2 x 0.25mm²

Construction

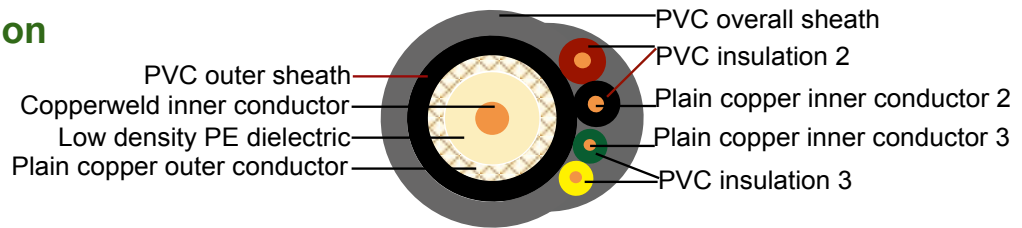

Inner conductor 1	Copper covered steel(CCS)	0.58 mm
Dielectric	Low density PE	Φ3.70 ± 0.10 mm
Outer conductor(shield)	Plain copper	180 x 0.10 mm
Shield coverage		94%
Sheath	PVC	Φ6.20 ± 0.10 mm
Inner conductor 2	Plain copper	2x 1.5 mm ²
Insulated cores 2	PVC	2 x Φ2.60 ± 0.10 mm
Inner conductor 3	Plain copper	2 x 0.25 mm ²
Insulated cores 3	PVC	2 x Φ1.15 ± 0.10 mm
Overall sheath	PVC/LSOH	Φ10.90 ± 0.30 mm

Electrical & Mechanical Characteristics

Impedance	75±5 Ohm
Nominal capacitance	67 pF/m
Velocity of propagation	66%
Insulation resistance	>2000 Mohm.Km
Inner conductor resistance	158 Ohm/Km
Outer conductor resistance	11 Ohm/Km
Operating temperature range	-25°C - +80 °C
Cores resistance 0.25 mm ² /1.50 mm ²	75 Ohm/Km / 12 Ohm/Km
Operatig Voltage(max)	0.25 KV/0.3 KV
Test Voltage	1.2 KV/2.0 KV
Copper weight	33.1 Kg/Km
Cable weight (approx.)	153.4 Kg/Km
Screening effectiveness	>55 dB

Attenuation

Frequency(MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)
50	7.4	2.26
100	10.7	3.26
200	15.7	4.79
400	22.7	6.92
500	25.7	7.84
600	28.7	8.75
860	34.8	10.61
1000	38.0	11.59

Return Loss

30-300 MHz	>31dB
300-600 MHz	>28dB
600-900 MHz	>24dB