




Armoured Cat 6 S/FTP 23AWG

Application

These Cat6 S/FTP cables are manufactured in accordance with IEC 61156-5 requirements, can support all Class E applications like Ethernet, Fast Ethernet, Gigabit Ethernet, suitable for basic voice and data installations up to 250MHz.

Standards

- EN 50288
- ISO 11801
- IEC 61156-5
- IEC 60332-1
- IEC 60754-1/2
- IEC 61034

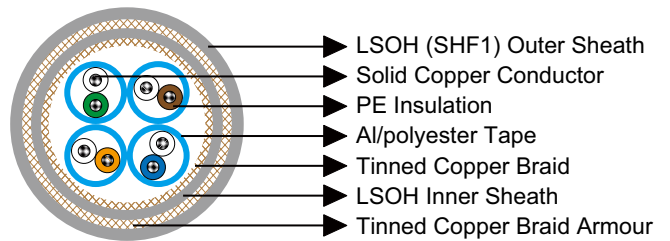

Construction

- Conductors: Solid bare copper conductor.
- Insulation: PE.
- Twining: Two coloured insulated conductors twisted together to form a pair.
- Individual Screen: Al/polyester tape.
- Overall Screen: Tinned copper braid.
- Inner Sheath: LSOH.
- Armour: Tinned copper braid.
- Outer Sheath: LSOH (SHF1).

Core Identification

- Pair 1: White,Blue
- Pair 2: White,Orange
- Pair 3: White,Green
- Pair 4: White,Brown

Electrical Properties

Characteristic Impedance(1-250MHz)	Ω	100±15
------------------------------------	----------	--------



Nominal Velocity of Propagation(NVP)		69%
Maximum Mutual Capacitance	nF/100m	5.6
Maximum Capacitance Unbalance	pF/100m	330
Maximum Resistance Unbalance		3%
Maximum Propagation Delay Skew(1-125MHz)	ns/100m	30
Maximum Propagation Delay@100MHz	ns/100m	536

Nominal Transmission Characteristics @20°C

FREQ MHz	NEXT dB/100m	Attenuation dB/100m	RL dB/100m	ACR dB/100m	ELFEXT dB/100m	PSNEXT dB/100m	PSACR dB/100m	PSELFEXT dB/100m
1.0	74.3	2.0	20.0	72.2	67.8	72.3	70.2	64.8
4.0	65.3	3.8	23.0	61.4	55.8	63.3	59.5	52.8
8.0	60.8	5.3	24.5	55.4	49.7	58.8	53.5	46.7
10.0	59.3	6.0	25.0	53.3	47.8	57.3	51.3	44.8
16.0	56.2	7.6	25.0	48.6	43.7	54.2	46.6	40.7
20.0	54.8	8.5	25.0	46.3	41.8	52.8	44.3	38.8
25.0	53.3	9.5	24.3	43.8	39.8	51.3	41.8	36.8
31.3	51.9	10.7	23.6	41.1	37.9	49.9	39.1	34.9
62.5	47.4	15.4	21.5	31.9	31.9	45.4	29.9	28.9
100.0	44.3	19.8	20.1	24.4	27.8	42.3	22.4	24.8
200.0	39.8	29.0	18.0	10.6	21.8	37.8	8.6	18.8
250.0	38.3	32.8	17.3	5.3	19.8	36.3	3.3	16.8
300.0	37.1	36.4	16.8	0.5	18.3	35.1	-1.5	15.3
350.0	36.1	39.8	16.3	-3.8	16.9	34.1	-5.8	13.9
400.0	35.3	43.0	15.9	-7.9	15.8	33.3	-9.9	12.8
450.0	34.5	46.3	15.5	-10.5	14.7	32.5	-12.5	11.7
500.0	33.8	48.9	15.2	-15.3	13.8	31.8	-17.3	10.8
550.0	33.2	51.8	14.9	-18.6	12.9	31.2	-20.6	9.9
600.0	32.4	54.5	14.7	-21.9	12.2	30.6	-23.9	9.2

* Data for 250MHz above are for reference only

Mechanical and Thermal Properties

Bending Radius: 8×OD (during installation); 4×OD (fixed installed)

Temperature Range: -20°C ~ +60°C

Dimensions and Weight

Part No.	Construction No. of elements×No. of cores in element×Cross section(mm ²)	Nominal Insulation Thickness mm	Nominal Sheath Thickness mm		Nominal Overall Diameter mm	Nominal Weight kg/km
			Inner	Outer		
MLN-S/FTPCAT6A4P23	4×2×23AWG	0.4	0.60	1.09	10.78	188

