




DVI Analog Cable(3 Coax, 7 Pair + 1Pair+5c)

Construction:

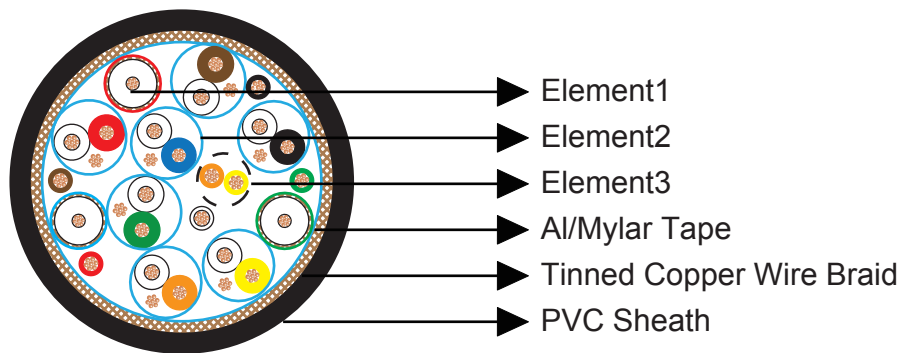


Element 1: 3 Coaxial(Cu/Foam PE+Skin/TC Braid+ PVC)

Conductor	Stranded annealed tinned copper wire, 30AWG(7/38AWG)
Insulation	Foam PE+Skin. Thickness 0.50mm. Outer diameter 1.37±0.05mm
Shield	Tinned copper braid, 0.1mm, 90% coverage
Sheath	PVC, Thickness 0.219mm. Outer diameter 2.15mm
Sheath Color	Green/Blue/Red

Element 2: 7PRx28AWG(7/36AWG) Stranded TC/Foam PE+Skin

Conductor	Stranded annealed tinned copper wire, 7/36AWG
Insulation	Foam PE+Skin. Thickness 0.25mm. Outer diameter 0.98±0.05mm
Insulation Color	Yellow and orange
Individual Shield	Aluminum/ mylar laminated tape applied with the metallic side down in electrical contact with a 28AWG tinned copper drain wire (7 strands formation). A 23 micron mylar tape is applied over the screening tape with a minimum 25% overlap.



Composite Cables

Element 3: 1P+5Cx28AWG(7/36AWG) Stranded TC/PE

Conductor	Stranded annealed tinned copper wire, 7/36AWG
Insulation	High density polyethylene. Thickness 0.12mm. Outer diameter 0.7 ± 0.05 mm
Insulation Color	Black/Brown/Red/Green/White

Element Assembly

Overall Screen	Aluminum/ mylar tape
Braid Shield	Braid of tinned copper wire. 24x10x0.12mm
Outer Sheath	LSFROH elastomeric sheath, Thickness 0.51mm. Outer diameter 9.5 ± 0.2 mm, other material is optional
Sheath Color	Black or as per the client's requirement

Physical Properties:

Temperature rating: -25°C to $+80^{\circ}\text{C}$

Minimum bending radius: 3 x Overall Diameter

Electrical Properties:

Rated voltage: 30V

Max conductor resistance at 20°C : 28AWG ≤ 237 Ohm/Km

30AWG ≤ 376 Ohm/Km

Min insulation resistance: $\geq 100\text{M}$ Ohm/m

Nom. differential impedance: Pairs 100 ± 15 Ohm

Coaxial 75 Ohm

Fire Performance in General:

Vertical flame propagation for a single insulated wire or cable

EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)



Vertical flame spread of vertically mounted bunched wires or cables

EN 50266-2-4 + EN 50305; IEC 60332-3-24; NF C 32-070 2.2 (C1); VDE 0472 Teil 804

Low Smoke Emission

EN 50268-2; IEC 61034-2; NF C 32-073 ;NF C 20-902; NF F 16 101; VDE 0472 Teil 816

Halogen Free

EN 50267-2-1; IEC 60754-1; NF C 32-074; NF C 20-454; VDE 0472 Teil 815

Low Corrosivity (Acidity & Conductivity)

EN 50267-2-2/3; IEC 60754-2; NF C 32-074; NF C 20-453; VDE 0472 Teil 813

Low Toxicity

EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853

Smoke Index

NF F 63 808; BS6853; NF F 16 101

Fire Performance Relating to Rolling Stock Application:

DIN 5510-2

BS 6853

NF F16 101

NF F 63 808



Fire Retardant
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4



Flame Retardant
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1




Low Toxicity
EN 50305; NF X70-100/NF
F63 808/TM1-04/BS 6853



Low Corrosivity
IEC60754-2/EN50267-2-2/3
NF C32-074/NF C20-453



Low Smoke Emission
IEC 61034-2 / EN 50268-2
NF C32-073/NF C 20-902



Zero Halogen
IEC 60754-1/EN 50267-2-1
NF C20-454

* The data included in the present catalogue are merely indicative; Caledonian Cables Limited reserves to itself the right to change them as its own discretion in any time.