




## NF M 87-202 EIFA

### Applications:

These NF M 87-202 EIFA instrumentation cables are used for safety extra-low use in petroleum and petrochemical units particularly for the transmission of a.c. or d.c. analogue signals, They are well adapted to underground use in industrial applications where hydrocarbons may be present and mechanical protections are needed (refinery areas, chemical plant...).

### Construction:

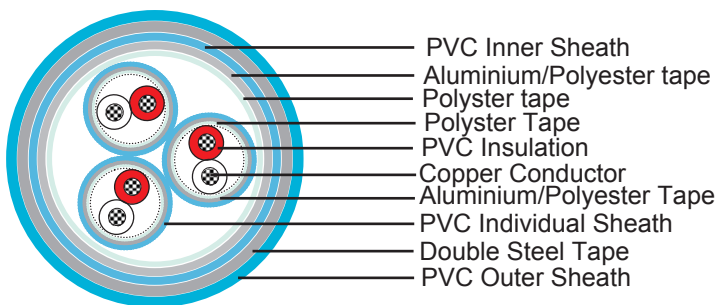

#### Conductor:

Solid or Stranded copper conductor

#### Insulation:

PVC (70 mm maximum pair length)

#### Individual Binder Tape:

Polyster tape

#### Individual Screen:

Aluminium/polyester tape

#### Individual Sheath:

PVC

#### Overall Binder Tape :

Polyster tape

#### Collective Screen:

Aluminium/polyester tape



French Standard (NF M 87-202)

**Inner Sheath:** PVC

**Armouring:**

Double Steel Tape

**Outer Sheath:**

PVC (Flame retardant, sunlight, mineral oil and hydrocarbon resistant)

**Outer Sheath Colour:**

Light-blue

**Core identification:**

Colours	Natural	Red	Blue	Yellow
1 pair	X	X		
1 triple	X	X	X	
1 quad	X	X	X	X

Natural cores printed with pair/triple number

**Standards References:**

NF M 87-202

UTE C 32-014

NF C 32-020

IEC 60332-1

IEC 60332-3-24

**Characteristics:**

**Voltage Rating:** 300/500V

**Operating Temperature:** -40°C/+90°C

**Installation Temperature:** MAX+50°C

**Maximum Voltage:** 250V

**Voltage Test:** 2000V

**Maximum conductor d.c. Resistance:**

Conductor Size	Ohm/km at +20°C
1/0.80mm(0.50 sqmm)	37.50
7/0.40mm(0.88 sqmm)	21.40



7/0.53mm(1.50 sqmm)	12.50
---------------------	-------

### Capacitance between cond. (nf/km):

0.5 sqmm ≤ 145

0.88 sqmm ≤ 160

1.50 sqmm ≤ 180

### Type/codification:

<b>1 Serie</b>	Number of pairs, triples or quads / 01 to 27
<b>2 Serie</b>	Lay up in pair(IP) ,triple (IT) , quads (IQ)
<b>3 Serie</b>	Core section 05 (0.5mm <sup>2</sup> ) , 09 (0.88 mm <sup>2</sup> ) or 15(1.5mm <sup>2</sup> )
<b>4 Serie</b>	Overall screen(EG) or individual screen + overall screen(EI)
<b>5 Serie</b>	Mechanical protection: without armour (SF), with armour (FA), with lead + armour(PF)

### Dimensions and Weight:

NF M 87-202	Number of beams x cross section	Cond. mm <sup>2</sup>	Outer Diameter(mm)		Weight (kg/km)
			Min.	Max.	
03 IP 05 EIFA	3X2X0.50	0.50	14.20	16.20	355
07 IP 05 EIFA	7X2X0.50	0.50	18.60	21.40	570
12 IP 05 EIFA	12X2X0.50	0.50	23.30	26.70	850
19 IP 05 EIFA	19X2X0.50	0.50	28.10	32.30	1210
27 IP 05 EIFA	27X2X0.50	0.50	32.80	37.60	1600
03 IP 09 EIFA	3X2X0.88	0.88	18.50	20.40	465
07 IP 09 EIFA	7X2X0.88	0.88	22.90	25.30	792
12 IP 09 EIFA	12X2X0.88	0.88	29.00	32.00	1205
19 IP 09 EIFA	19X2X0.88	0.88	34.80	38.40	1709
27 IP 09 EIFA	27X2X0.88	0.88	40.60	44.80	2275
03 IP 09 EIFA	3X2X0.88	0.88	16.70	19.20	270
07 IP 09 EIFA	7X2X0.88	0.88	22.40	25.70	800
12 IP 09 EIFA	12X2X0.88	0.88	28.10	32.30	1185
19 IP 09 EIFA	19X2X0.88	0.88	34.10	39.10	1720
27 IP 09 EIFA	27X2X0.88	0.88	39.80	45.70	2285
01 IP 15 EIFA	1X2X1.50	1.50	10.20	11.70	200
07 IT 05 EIFA	7X3X0.50	0.50	20.30	23.30	690
12 IT 05 EIFA	12X3X0.50	0.50	25.40	28.00	1005
12 IT 09 EIFA	12X3X0.88	0.88	25.00	28.70	1025
01 IT 15 EIFA	1X3X1.50	1.50	10.50	12.00	220