


CTX 41

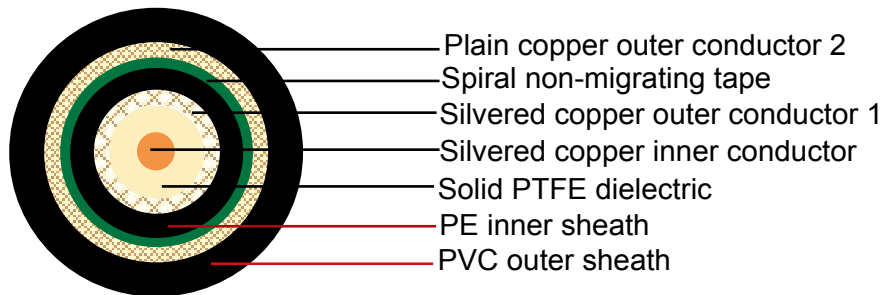

Construction

Inner conductor	Silver plated copper	1.00 mm
Dielectric	Foam PE	$\Phi 4.10 \pm 0,10$ mm
Outer conductor (shield 1)	Silver plated copper	168 x 0.13 mm
Shield coverage		95%
Inner sheath	PE	$\Phi 6.60 \pm 0,10$ mm
Tape	Spiral non-migrating tape	h. 20 mm
Outer conductor (shield 2)	Plain copper	192 x 0.15 mm
Shield coverage		94%
Outer sheath	PVC/LSOH	$\Phi 8.50 \pm 0.10$ mm

Electrical & Mechanical Characteristics

Impedance	75 \pm 5 Ohm
Nominal capacitance	56 pF/m
Velocity of propagation	80%
Insulation resistance	>5000 Mohm.Km
Inner conductor resistance	22.5 Ohm/Km
Outer conductor resistance1	7.0 Ohm/Km
Outer conductor resistance2	7.5 Ohm/Km
Operating temperature range	-25°C - +80 °C
Copper weight	63.3 Kg/Km
Cable weight (approx.)	111.2 Kg/Km
Screening effectiveness	>70 dB

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Max. Attenuation(dB/100ft)
50	5.2	1.6
100	7.6	2.3
200	10.8	3.3
400	16.0	4.9
500	18.6	5.7
600	20.8	6.3
860	25.6	7.8
1000	28.0	8.5

Return Loss

30-300 MHz	>30dB
300-600 MHz	>29dB
600-900 MHz	>28dB